


RN Non-Polarized, Wide Temperature Range Series

- Wide operating temperature range of -40 ~ +105°C
- Designed for use in circuits with reversing polarity
- Complied to the RoHS directive

NP Non-polarized **S** Solvent Proof


RD → **RN**
Non-polar



Item	Characteristics																			
Operating temperature range	-40 ~ +105°C																			
Leakage current max.	$I = 0.03CV$ or $3\mu A$ whichever is greater (after 5 minutes)																			
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C																			
Dissipation factor max. (at 120Hz, 20°C)	Capacitance > 1000 μF : $\tan\delta$ increases by 0.02 for each 1000 μF from below value.																			
	<table border="1"> <thead> <tr> <th>WV</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>80</th> <th>100</th> </tr> </thead> <tbody> <tr> <td>$\tan\delta$</td> <td>0.24</td> <td>0.20</td> <td>0.16</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.12</td> <td>0.12</td> <td>0.12</td> </tr> </tbody> </table>	WV	6.3	10	16	25	35	50	63	80	100	$\tan\delta$	0.24	0.20	0.16	0.16	0.14	0.12	0.12	0.12
WV	6.3	10	16	25	35	50	63	80	100											
$\tan\delta$	0.24	0.20	0.16	0.16	0.14	0.12	0.12	0.12	0.12											
Low temperature characteristics (Impedance ratio at 120Hz)	<table border="1"> <thead> <tr> <th>WV</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25 ~ 100</th> </tr> </thead> <tbody> <tr> <td>Z-25°C/Z+20°C</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z-40°C/Z+20°C</td> <td>8</td> <td>6</td> <td>4</td> <td>3</td> </tr> </tbody> </table>	WV	6.3	10	16	25 ~ 100	Z-25°C/Z+20°C	4	3	2	2	Z-40°C/Z+20°C	8	6	4	3				
	WV	6.3	10	16	25 ~ 100															
	Z-25°C/Z+20°C	4	3	2	2															
Z-40°C/Z+20°C	8	6	4	3																
Load life (after application of the rated voltage for 1000 hours at 105°C)	<table border="1"> <tbody> <tr> <td>Leakage current</td> <td>Less than specified value</td> </tr> <tr> <td>Capacitance change</td> <td>Within $\pm 20\%$ of initial value</td> </tr> <tr> <td>$\tan\delta$</td> <td>Less than 200% of specified value</td> </tr> <tr> <td>Test method</td> <td>Polarity reverse each 250 hours</td> </tr> </tbody> </table>	Leakage current	Less than specified value	Capacitance change	Within $\pm 20\%$ of initial value	$\tan\delta$	Less than 200% of specified value	Test method	Polarity reverse each 250 hours											
Leakage current	Less than specified value																			
Capacitance change	Within $\pm 20\%$ of initial value																			
$\tan\delta$	Less than 200% of specified value																			
Test method	Polarity reverse each 250 hours																			
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4																			

● DRAWING

Unit : mm

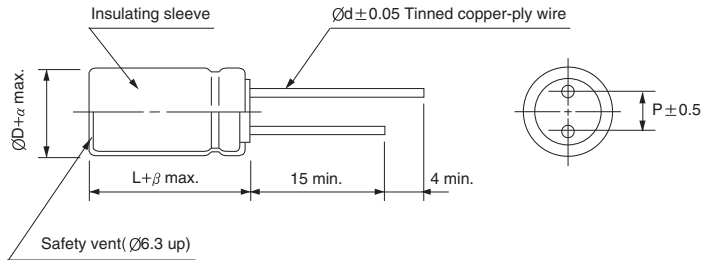

ØD	5	6.3	8	10	12.5	16	18	22
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5	10.0
Ød	0.5	0.5	0.6	0.6	0.6	0.8	0.8	1.0
β	1.5		2.0		3.0			
α	0.5			1.0				


● FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

µF \ Frequency	50Hz	120Hz	1kHz	10kHz ≤
~ 47	0.75	1.00	1.55	2.00
68 ~ 680	0.80	1.00	1.34	1.50
1000 ~	0.85	1.00	1.13	1.15

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

RN series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

μF \diagdown WV	6.3	10	16	25	35	50	63	80	100
1.0						5 × 11 11	5 × 11 12	5 × 11 12	5 × 11 13
1.5						5 × 11 14	5 × 11 15	5 × 11 15	5 × 11 16
2.2						5 × 11 17	5 × 11 18	5 × 11 18	5 × 11 19
3.3						5 × 11 21	5 × 11 23	6.3 × 11 26	6.3 × 11 27
4.7					5 × 11 23	5 × 11 25	6.3 × 11 31	6.3 × 11 31	8 × 11.5 39
6.8				5 × 11 26	5 × 11 27	6.3 × 11 34	6.3 × 11 37	8 × 11.5 44	10 × 12.5 54
10			5 × 11 31	5 × 11 31	6.3 × 11 38	6.3 × 11 41	8 × 11.5 53	10 × 12.5 62	10 × 12.5 65
15		5 × 11 34	5 × 11 38	6.3 × 11 44	8 × 11.5 55	8 × 11.5 60	10 × 12.5 76	10 × 12.5 76	10 × 16 88
22	5 × 11 38	5 × 11 41	6.3 × 11 53	8 × 11.5 63	8 × 11.5 67	10 × 12.5 84	10 × 16 101	10 × 16 101	
33	5 × 11 46	6.3 × 11 58	8 × 11.5 77	8 × 11.5 77	10 × 12.5 95	10 × 16 113	10 × 16 124	10 × 20 135	
47	6.3 × 11 63	6.3 × 11 69	8 × 11.5 92	10 × 12.5 106	10 × 16 125	10 × 20 147	10 × 20 161	12.5 × 20 189	
68	6.3 × 11 76	8 × 11.5 98	10 × 12.5 128	10 × 16 140	10 × 20 164	10 × 20 177	12.5 × 20 227	12.5 × 25 248	
100	8 × 11.5 109	10 × 12.5 139	10 × 16 170	10 × 20 185	10 × 20 198	12.5 × 20 251	12.5 × 25 300	16 × 25 333	
150	10 × 12.5 155	10 × 16 186	10 × 20 227	12.5 × 20 267	12.5 × 20 285	12.5 × 25 336	16 × 25 408	16 × 35.5 468	
220	10 × 12.5 188	10 × 20 246	12.5 × 20 323	12.5 × 20 323	12.5 × 25 376	16 × 25 451	16 × 35.5 567	18 × 35.5 609	
330	10 × 16 252	12.5 × 20 354	12.5 × 20 396	12.5 × 25 431	16 × 25 511	16 × 35.5 634	18 × 35.5 745	18 × 40 782	
470	10 × 20 328	12.5 × 20 422	12.5 × 25 515	16 × 25 571	16 × 35.5 701	18 × 35.5 812	18 × 40 933	22 × 41 1027	
680	12.5 × 20 464	12.5 × 25 554	16 × 25 687	16 × 35.5 788	18 × 35.5 904	18 × 40 1025	22 × 41 1236		
1000	12.5 × 25 613	16 × 25 745	16 × 35.5 956	18 × 35.5 1026	18 × 40 1151	22 × 41 1368			
1500	16 × 25 800	16 × 35.5 999	18 × 35.5 1184	18 × 40 1243	22 × 41 1451				
2200	16 × 35.5 1072	18 × 35.5 1242	18 × 40 1428	22 × 41 1572					
3300	18 × 35.5 1361	18 × 40 1534	22 × 41 1835	 <p>Case size $\varnothing D \times L$ (mm) Ripple current (mA rms) at 105°C, 120Hz</p>					
4700	18 × 40 1650	22 × 41 1942							
6800	22 × 41 2060								